THIS DRAWING IS A CONTROLLED DOCUMENT.

DWG NO 1907122

USED ON

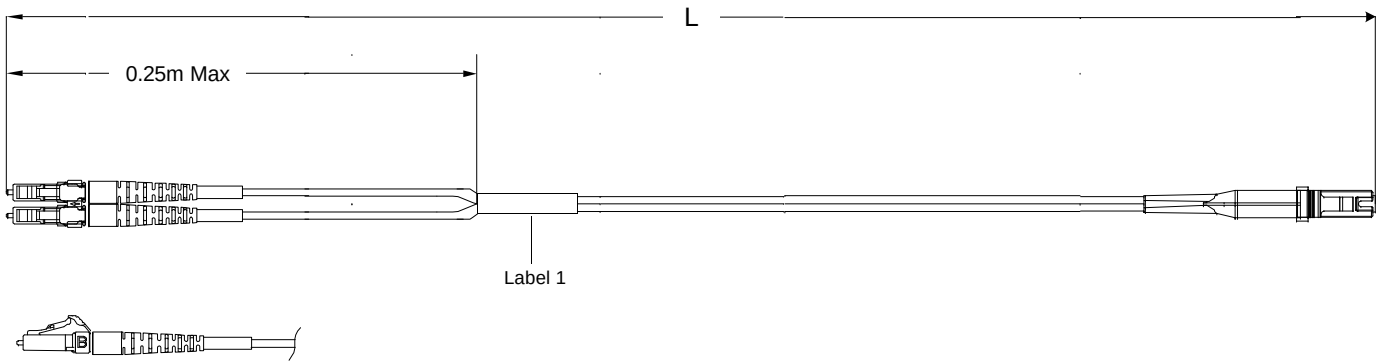

Left Side

Connector(s): LC-Duplex Secure
Mode: MM
Housing Color: Aqua
Geom. Spec: N/A

Fiber Path

A - ——— - Fiber B
B - ——— - Fiber A

Notes:

2 Includes dust caps (not shown on print).

Right Side

Connector(s): MT-RJ (No Pins)
Mode: MM
Housing Color: Black
Geom. Spec: 115-1215



VIEW D-D
NOT TO SCALE

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES, AND MAY NOT BE COPIED, DISCLOSED, OR USED IN WHOLE OR IN PART WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA 17105.

LOC CE
DIST 16

CAC Customer Layout Rev: D

P	LTR	REVISION RECORD	DATE	DWN	APVD
	A	Rev Per EC# RELEASE	3/25/2010	-	JS

DIMENSIONS: meters

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -

Restricted To:

DWN	Cable Assy Configurator	MATERIAL -	HEAT TREAT -
CHK	Jeff Shipe		
APVD	Jeff Shipe	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
NAME	FO C/A - 2 fiber, 50/125, OFNP (Plenum) jacket, LC-Duplex Secure to MT-RJ (No Pins)		
SCALE NTS	SIZE A2	DRAWING NO C- 1907122	SHEET 1 of 4 REV A

8 7 6 5 4 3 2 1

D C B A

Part #	L (meters)	L (feet)	LC-Duplex Secure, Aqua		MT-RJ (No Pins), Black	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
0-1907122-1	0.950 - 1.050	3.11 - 3.44	0.5	-	0.5	20
0-1907122-2	1.950 - 2.050	6.39 - 6.72	0.5	-	0.5	20
0-1907122-3	2.950 - 3.050	9.67 - 10.00	0.5	-	0.5	20
0-1907122-4	3.920 - 4.080	12.86 - 13.38	0.51	-	0.51	20
0-1907122-5	4.920 - 5.080	16.14 - 16.66	0.51	-	0.51	20
0-1907122-6	5.920 - 6.080	19.42 - 19.94	0.51	-	0.51	20
0-1907122-7	6.920 - 7.080	22.70 - 23.22	0.51	-	0.51	20
0-1907122-8	7.920 - 8.080	25.98 - 26.50	0.51	-	0.51	20
0-1907122-9	8.850 - 9.150	29.03 - 30.01	0.51	-	0.51	20
1-1907122-0	9.850 - 10.150	32.31 - 33.30	0.52	-	0.52	20
1-1907122-1	10.850 - 11.150	35.59 - 36.58	0.52	-	0.52	20
1-1907122-2	11.850 - 12.150	38.87 - 39.86	0.52	-	0.52	20
1-1907122-3	12.850 - 13.150	42.15 - 43.14	0.52	-	0.52	20
1-1907122-4	13.850 - 14.150	45.43 - 46.42	0.52	-	0.52	20
1-1907122-5	14.850 - 15.150	48.72 - 49.70	0.52	-	0.52	20
1-1907122-6	15.840 - 16.160	51.96 - 53.01	0.52	-	0.52	20
1-1907122-7	16.830 - 17.170	55.21 - 56.33	0.53	-	0.53	20
1-1907122-8	17.820 - 18.180	58.46 - 59.64	0.53	-	0.53	20
1-1907122-9	18.810 - 19.190	61.71 - 62.95	0.53	-	0.53	20
2-1907122-0	19.800 - 20.200	64.96 - 66.27	0.53	-	0.53	20
2-1907122-1	20.790 - 21.210	68.20 - 69.58	0.53	-	0.53	20
2-1907122-2	21.780 - 22.220	71.45 - 72.90	0.53	-	0.53	20
2-1907122-3	22.770 - 23.230	74.70 - 76.21	0.53	-	0.53	20
2-1907122-4	23.760 - 24.240	77.95 - 79.52	0.54	-	0.54	20
2-1907122-5	24.750 - 25.250	81.20 - 82.84	0.54	-	0.54	20
2-1907122-6	25.740 - 26.260	84.44 - 86.15	0.54	-	0.54	20
2-1907122-7	26.730 - 27.270	87.69 - 89.46	0.54	-	0.54	20
2-1907122-8	27.720 - 28.280	90.94 - 92.78	0.54	-	0.54	20
2-1907122-9	28.710 - 29.290	94.19 - 96.09	0.54	-	0.54	20
3-1907122-0	29.700 - 30.300	97.44 - 99.40	0.55	-	0.55	20
3-1907122-1	30.690 - 31.310	100.68 - 102.72	0.55	-	0.55	20
3-1907122-2	31.680 - 32.320	103.93 - 106.03	0.55	-	0.55	20
3-1907122-3	32.670 - 33.330	107.18 - 109.35	0.55	-	0.55	20
3-1907122-4	33.660 - 34.340	110.43 - 112.66	0.55	-	0.55	20
3-1907122-5	34.650 - 35.350	113.68 - 115.97	0.55	-	0.55	20
3-1907122-6	35.640 - 36.360	116.92 - 119.29	0.55	-	0.55	20
3-1907122-7	36.630 - 37.370	120.17 - 122.60	0.56	-	0.56	20
3-1907122-8	37.620 - 38.380	123.42 - 125.91	0.56	-	0.56	20
3-1907122-9	38.610 - 39.390	126.67 - 129.23	0.56	-	0.56	20
4-1907122-0	39.600 - 40.400	129.92 - 132.54	0.56	-	0.56	20
4-1907122-1	40.590 - 41.410	133.16 - 135.85	0.56	-	0.56	20
4-1907122-2	41.580 - 42.420	136.41 - 139.17	0.56	-	0.56	20

Qty	U of M	Description	Item No.
2	piece	LC Connector Assy, 1.6mm-2.0mm, MM	14
1	piece	MT-RJ FERRULE, THERMOPLAST,MM	13
1	piece	HOUSING, CONN, MT-RJ,BLACK	12
AR	meter	2 fiber, 50/125, 1.8mm, Twinzip, Orange, OFNP (Plenum)	11
1	piece	SPRING, MT-RJ, 3.8 DESIGN	10
1	piece	PIN KEEPER, 3.8MM	9
1	piece	MT-RJ, SPRING PUSH, UNIVERSAL	8
1	piece	CRIMP EYELET, MT-RJ	7
1	piece	LC Duplex clip, black	6
2	piece	Eyelet/Shrink tube assembly - White	5
1	piece	DUST COVER, MT-RJ	4
1	piece	Trace Label	3
2	piece	LC, SC, FC Straight Boot, Beige	2
1	piece	MT-RJ TwinZip Bend Limiting Boot, Beige	1

USED ON

DWG NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES, AND IS NOT TO BE DISCLOSED TO ANY PERSON OR COMPANY OUTSIDE THE TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA 17105-3608.

LOC CE

DIST 16

CAC Customer Layout Rev: D

LTR	REVISION RECORD	DATE	DWN	APVD
A	Rev Per EC# RELEASE	3/25/2010	-	JS

DIMENSIONS: meters

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -

Restricted To:

DWN: Cable Assy Configurator
MATERIAL: -
HEAT TREAT: -
CHK: Jeff Shipe
APVD: Jeff Shipe

AMP Tyco Electronics, Inc.
Harrisburg, PA 17105-3608

NAME: FO C/A - 2 fiber, 50/125, OFNP (Plenum) jacket, LC-Duplex Secure to MT-RJ (No Pins)

SCALE: NTS | SIZE: A2 | DRAWING NO: C- 1907122 | SHEET: 2 of 4 | REV: A

8 7 6 5 4 3 2 1

D C B A

Part #	L (meters)	L (feet)	LC-Duplex Secure, Aqua		MT-RJ (No Pins), Black	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
4-1907122-3	42.570 - 43.430	139.66 - 142.48	0.56	-	0.56	20
4-1907122-4	43.560 - 44.440	142.91 - 145.80	0.57	-	0.57	20
4-1907122-5	44.550 - 45.450	146.16 - 149.11	0.57	-	0.57	20
4-1907122-6	45.540 - 46.460	149.40 - 152.42	0.57	-	0.57	20
4-1907122-7	46.530 - 47.470	152.65 - 155.74	0.57	-	0.57	20
4-1907122-8	47.520 - 48.480	155.90 - 159.05	0.57	-	0.57	20
4-1907122-9	48.510 - 49.490	159.15 - 162.36	0.57	-	0.57	20
5-1907122-0	49.500 - 50.500	162.40 - 165.68	0.58	-	0.58	20
5-1907122-1	50.490 - 51.510	165.64 - 168.99	0.58	-	0.58	20
5-1907122-2	51.480 - 52.520	168.89 - 172.30	0.58	-	0.58	20
5-1907122-3	52.470 - 53.530	172.14 - 175.62	0.58	-	0.58	20
5-1907122-4	53.460 - 54.540	175.39 - 178.93	0.58	-	0.58	20
5-1907122-5	54.450 - 55.550	178.64 - 182.25	0.58	-	0.58	20
5-1907122-6	55.440 - 56.560	181.88 - 185.56	0.58	-	0.58	20
5-1907122-7	56.430 - 57.570	185.13 - 188.87	0.59	-	0.59	20
5-1907122-8	57.420 - 58.580	188.38 - 192.19	0.59	-	0.59	20
5-1907122-9	58.410 - 59.590	191.63 - 195.50	0.59	-	0.59	20
6-1907122-0	59.400 - 60.600	194.88 - 198.81	0.59	-	0.59	20
6-1907122-1	60.390 - 61.610	198.12 - 202.13	0.59	-	0.59	20
6-1907122-2	61.380 - 62.620	201.37 - 205.44	0.59	-	0.59	20
6-1907122-3	62.370 - 63.630	204.62 - 208.75	0.59	-	0.59	20
6-1907122-4	63.360 - 64.640	207.87 - 212.07	0.6	-	0.6	20
6-1907122-5	64.350 - 65.650	211.12 - 215.38	0.6	-	0.6	20
6-1907122-6	65.340 - 66.660	214.37 - 218.70	0.6	-	0.6	20
6-1907122-7	66.330 - 67.670	217.61 - 222.01	0.6	-	0.6	20
6-1907122-8	67.320 - 68.680	220.86 - 225.32	0.6	-	0.6	20
6-1907122-9	68.310 - 69.690	224.11 - 228.64	0.6	-	0.6	20
7-1907122-0	69.300 - 70.700	227.36 - 231.95	0.61	-	0.61	20
7-1907122-1	70.290 - 71.710	230.61 - 235.26	0.61	-	0.61	20
7-1907122-2	71.280 - 72.720	233.85 - 238.58	0.61	-	0.61	20
7-1907122-3	72.270 - 73.730	237.10 - 241.89	0.61	-	0.61	20
7-1907122-4	73.260 - 74.740	240.35 - 245.20	0.61	-	0.61	20
7-1907122-5	74.250 - 75.750	243.60 - 248.52	0.61	-	0.61	20
7-1907122-6	75.240 - 76.760	246.85 - 251.83	0.61	-	0.61	20
7-1907122-7	76.230 - 77.770	250.09 - 255.15	0.62	-	0.62	20
7-1907122-8	77.220 - 78.780	253.34 - 258.46	0.62	-	0.62	20
7-1907122-9	78.210 - 79.790	256.59 - 261.77	0.62	-	0.62	20
8-1907122-0	79.200 - 80.800	259.84 - 265.09	0.62	-	0.62	20

USED ON

DWG NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES, AND IS NOT TO BE DISCLOSED TO ANY PERSON OR COMPANY OUTSIDE THE TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA USA.

LOC CE

DIST 16

CAC Customer Layout Rev: D

P	LTR	REVISION RECORD	DATE	DWN	APVD
	A	Rev Per EC# RELEASE	3/25/2010	-	JS

DIMENSIONS: meters

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -

Restricted To:

DWN: Cable Assy Configurator
CHK: Jeff Shipe
APVD: Jeff Shipe
MATERIAL: -
HEAT TREAT: -

AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608

NAME: FO C/A - 2 fiber, 50/125, OFNP (Plenum) jacket, LC-Duplex Secure to MT-RJ (No Pins)

SCALE: NTS | SIZE: A2 | DRAWING NO: C- 1907122 | SHEET: 3 of 4 | REV: A

8 7 6 5 4 3 2 1

D C B A

Label 1 Per specification 107-1645-1

Trace # - Bar Code
Trace # - Human Readable
Part Number
Country of Origin

This label is used on all lengths on this drawing.

USED ON

DWG NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC	DIST
CE	16

P	LTR	REVISION RECORD	DATE	DWN	APVD
	A	Rev Per EC# RELEASE	3/25/2010	-	JS

DIMENSIONS: meters

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -

Restricted To:

DWN Cable Assy Configurator	MATERIAL -	HEAT TREAT -	
CHK Jeff Shipe	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608		
APVD Jeff Shipe			
NAME FO C/A - 2 fiber, 50/125, OFNP (Plenum) jacket, LC-Duplex Secure to MT-RJ (No Pins)			
SCALE NTS	SIZE A2	DRAWING NO C- 1907122	SHEET 4 of 4	REV A

CAC Customer Layout Rev: D

8 7 6 5 4 3 2 1

D C B A