
NOTES:

- 1.0 MATERIALS:
- 1.1 HOUSING: STAINLESS STEEL PER ASTM-A582, TYPE 303.
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ROD ALLOY C172, PER ASTM-B196.
- 1.3 DIELECTRIC: PTFE FLUOROCARBON PER ASTM-D1457.
- 2.0 PLATING:
- 2.1 HOUSING: PASSIVATED PER MIL-F-14072 AND QQ-P-35
- 2.2 CENTER CONTACT: GOLD PER MIL-G-45204, TYPE II, CLASS 2.
- 3.0 ELECTRICAL SPECIFICATIONS:
- 3.1 FREQUENCY RANGE: DC to 26.5 GHz
- 3.2 VSWR (MAX.):

DC to 20 GHz: 1.10:1 20 to 26.5 GHz: 1.15:1

- 4.0 MARKING: MARK UNIT AS SHOWN NOTE: BODY SHOULD BE STAMPED BEFORE ASSEMBLY (REF.: INK-06088-27-04)
- 5.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

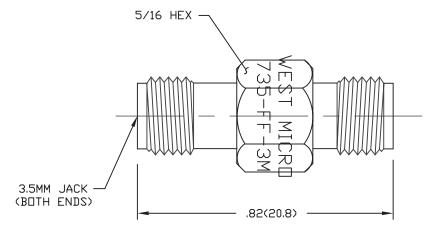

DWG NO. WAS: 05517-01-00

DATE	8/29/84	7/2/85	3/21/86	5/17/88	7/31/89	11/20/92
DESCRIPTION	RELEASED	ECR 3702	ECR 4398	ECR 6003	ECR 6545	REDRAW ON CAD
REV.	1	4	8	ပ	٥	ы

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Cinch Connectivity Solutions.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. FLATNESS: T.I.R. _ CONCENTRICITY: T.I.R.

ANGLES AND PERPENDICULARITY: ±1'

A.BEATTY 11/20/92 A.OSGA 11/20/92 CHECKED/DATE M.HOLLMAN 11/20/92

a bel group

MIDWEST MICROWAVE TITLE

ADAPTER - 3.5MM JACK cinch TO 3.5MM JACK CONNECTIVITY SOLUTION OUTLINE DRAWING

> DRAWING NUMBER REV. ADT-2735-FF-3MM-02-01 Ε

SCALE: 5 = 1SHEET 1