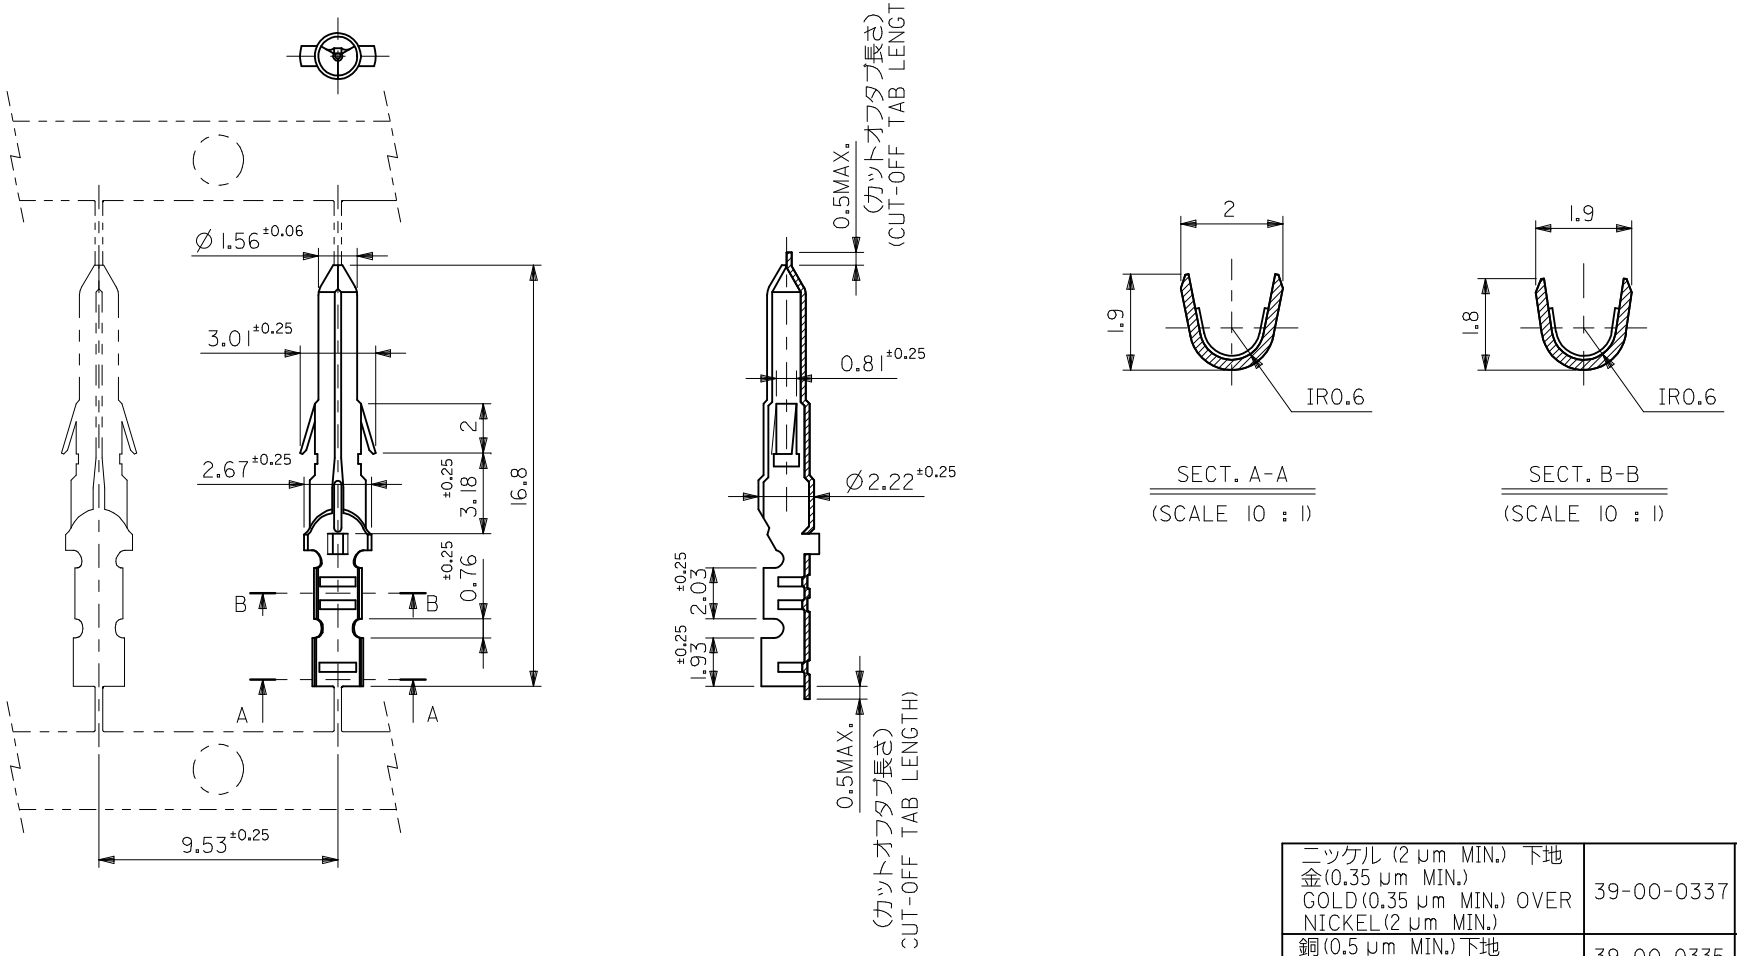


注記 NOTES:

1. 一般公差 : ±0.4
   GENERAL TOLERANCES: ±0.4

| | | | |
|---|---|---|---|
| ニッケル (2 μm MIN.) 下地<br>金(0.35 μm MIN.)<br>GOLD(0.35 μm MIN.) OVER<br>NICKEL(2 μm MIN.) | 39-00-0337 | 1854GL | バラ端子<br>LOOSE |
| 銅(0.5 μm MIN.)下地<br>錫 (0.9 μm MIN.)<br>TIN(0.9 μm MIN.) OVER<br>COPPER(0.5 μm MIN.) | 39-00-0335 | 1854TL | バラ端子<br>LOOSE |
| | 39-00-0280 | 1854T | 連鎖状端子<br>CHAIN |
| メッキ<br>PLATING | EDP.NO. | ENG.NO. | 形状<br>FORM |

| | |
|---|---|
| 材料 MATERIAL | 黄銅 BRASS 0.2 t |
| 仕上げ FINISH | 〃 |
| 適用電線範囲 WIRE RANGE | AWG#22-#28 |
| 被覆外径 INS. RANGE | Ø 1.1~1.5 |

REVISED
EC NO: J2017-0317 2017/03/06
DRWN:GES
CHKD:
APPR:MSASAO 2017/03/15
DESCRIPTION
REV
L

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | | | |
|---|---|---|---|
| 0.25 | UNDER | | ±0.03 |
| 0.25 | OVER 0.5 | UNDER | ±0.05 |
| 0.5 | OVER 0 | UNDER | ±0.1 |
| 0 | OVER 10 | UNDER | ±0.2 |
| 10 | OVER 30 | UNDER | ±0.25 |
| 30 | OVER | | ±0.3 |
| ANGULAR | ±3 ° | | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

| | |
|---|---|
| DIMENSION STYLE | MM ONLY |
| SCALE | 5:1 |
| DESIGN UNITS | METRIC |
| | THIRD ANGLE PROJECTION |
| DRAWN BY / DATE | H.HASEGAWA 1993/07/09 |
| CHECKED BY / DATE | H.HIRAMOTO 1993/07/09 |
| APPROVED BY / DATE | M.FUKUSHIMA 1993/07/09 |
| MATERIAL NO. | SEE CHART |
| TITLE | 0.62 DIA CRIMP MALE TERM |
| | molex |
| DOCUMENT NO. | SD-1854* |
| SHEET NO. | 1 OF 1 |
| SIZE | A3 |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION