



| PCB distance    | Type                      | Pictures | Number of contacts | Female                  |              |                  |   | Adapter        | Male                             |              |                         |
|-----------------|---------------------------|----------|--------------------|-------------------------|--------------|------------------|---|----------------|----------------------------------|--------------|-------------------------|
|                 |                           |          |                    | Termination length (mm) | Termination* | Stand off needed | Part number   |                | Part number                      | Termination* | Termination length (mm) |
| 32.2 - 33.8 mm  | DIN 41 612 type C         |          | 96                 | 17.0                    | P/S          | X                | 09 03 296 6862                                      | -              | 09 03 196 6922<br>09 03 196 6920 | S<br>R       | 3.0                     |
|                 |                           |          | 64                 | 17.0                    | P/S          | X                | 09 03 264 6862                                      | -              | 09 03 164 6922                   | S            | 3.0                     |
|                 |                           |          |                    | Female                  |              |                  | Adapter   | Female         |                                  |              |                         |
| 37.05 - 37.8 mm | DIN 41 612 type 2C        |          | 48                 | 2.9                     | S            | -                | 09 23 248 6824                                      | 09 28 148 5532 | 09 23 248 6824                   | S            | 2.9                     |
|                 |                           |          |                    |                         | R            | -                | 09 23 248 6841                                      |                | 09 23 248 6841                   | R            |                         |
|                 |                           |          |                    | 4.5                     | S            | -                | 09 23 248 6825                                      |                | 09 23 248 6825                   | S            |                         |
|                 |                           |          |                    |                         | R            | -                | 09 23 248 6829                                      |                | 09 23 248 6829                   | R            |                         |
|                 |                           |          |                    |                         | P            | -                | 09 23 248 6850                                      |                | 09 23 248 6850                   | P            |                         |
| 40.05 - 41.5 mm | DIN 41 612 types C / R    |          | 96                 | 2.9                     | S            | -                | 09 03 296 6824                                      | 09 28 148 5531 | 09 03 296 6824                   | S            | 2.9                     |
|                 |                           |          |                    |                         | R            | -                | 09 03 296 6841                                      |                | 09 03 296 6841                   | R            |                         |
|                 |                           |          |                    | 4.5                     | K            | -                | 09 03 296 6855                                      |                | 09 03 296 6855                   | K            |                         |
|                 |                           |          |                    |                         | S            | -                | 09 03 296 6825                                      |                | 09 03 296 6825                   | S            |                         |
|                 |                           |          |                    |                         | R            | -                | 09 03 296 6829                                      |                | 09 03 296 6829                   | R            |                         |
|                 |                           |          |                    |                         | K            | -                | 09 03 296 6845                                      |                | 09 03 296 6845                   | K            |                         |
|                 | DIN 41 612 types 2C / 2R  |          | 48                 | 2.9                     | S            | -                | 09 23 248 6824                                      | 09 28 148 5531 | 09 23 248 6824                   | S            | 2.9                     |
|                 |                           |          |                    |                         | R            | -                | 09 23 248 6841                                      |                | 09 23 248 6841                   | R            |                         |
|                 |                           |          |                    | 4.5                     | S            | -                | 09 23 248 6825                                      |                | 09 23 248 6825                   | S            |                         |
|                 |                           |          |                    |                         | R            | -                | 09 23 248 6829                                      |                | 09 23 248 6829                   | R            |                         |
| 20.0 - ∞ mm     | Micro Card Edge connector |          | 40                 | -                       | SMT          | -                | 2 x 15 01 040 4601 040 mating with intermediate PCB | SMT            | -                                |              |                         |
|                 |                           |          | 100                | -                       | SMT          | -                | 2 x 15 02 100 4601 040 mating with intermediate PCB | SMT            | -                                |              |                         |

\* Terminations: S = Solder; K = Solder with kinked pins; P = Press-in; P/S = Press-in pins soldered; R = SMC = Through hole reflow soldering; SMT = Surface Mount Technology

Usage of stand offs:

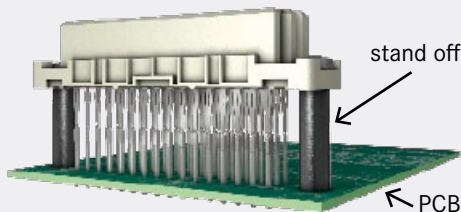

Usage of intermediate PCB:

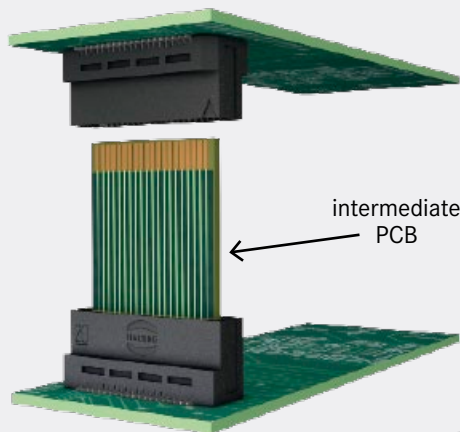

Usage of adapter:

