

## Housing - HC-B 16-TFQ-H-O1STM40G - 1460157

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



HEAVYCON B16 sleeve housing, for double locking latch, height: 76 mm, with 1 x M40 thread, straight cable outlet



### Key commercial data

Packing unit	1 1
Custom tariff number	85389099
Country of origin	Germany

### Technical data

#### Dimensions

Height	76 mm
Width	43 mm
Length	94 mm

#### Ambient conditions

Schutzart Gehäuse (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

#### General

Note	For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K
Design	B16
Housing type	Sleeve housings
Locking type	For double locking latch
No. of cable exits	1
Cable exit	Straight
Screw connection	None
Type of the screw connection	1x M40
Housing material	Aluminum die-cast

# Housing - HC-B 16-TFQ-H-O1STM40G - 1460157

## Technical data

### General

Housing surface material	Powder-coated, gray
--------------------------	---------------------

## Classifications

### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440209

### ETIM

ETIM 3.0	EC000438
ETIM 4.0	EC000437
ETIM 5.0	EC000437

### UNSPSC

UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502
UNSPSC 11	31261502
UNSPSC 12.01	31261502
UNSPSC 13.2	31261502

## Accessories

### Accessories

#### Full screw connection

Cable gland - HC-K-KV-M40(19-28) - 1690655



Plastic screw connection up to 5 bar, thread length: 10 mm, cable diameter: 19 - 28 mm, WAF 46, screw connection: M40

## Housing - HC-B 16-TFQ-H-O1STM40G - 1460157

### Accessories

Cable gland - HC-M-KV-M40(19-27) - 1690590



Metal screw connection up to 5 bar, thread length: 8 mm, cable diameter: 19 - 27 mm, WAF 43, screw connection: M40

---

Cable gland - HC-M-KV-M40(27-34) - 1607729




Metal screw connection up to 5 bar, thread length: 8 mm, cable diameter: 27 ... 34 mm, WAF 50, screw connection: M40

---

### Drawings

Dimensioned drawing

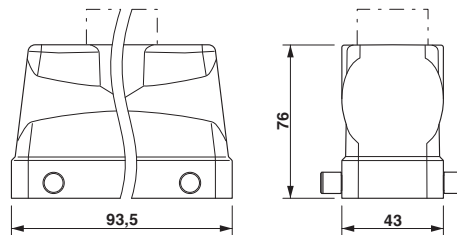

Dimensional drawing

---