



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16	B	REVISED PER ECO 07-002853	21MAR2007	DW JL

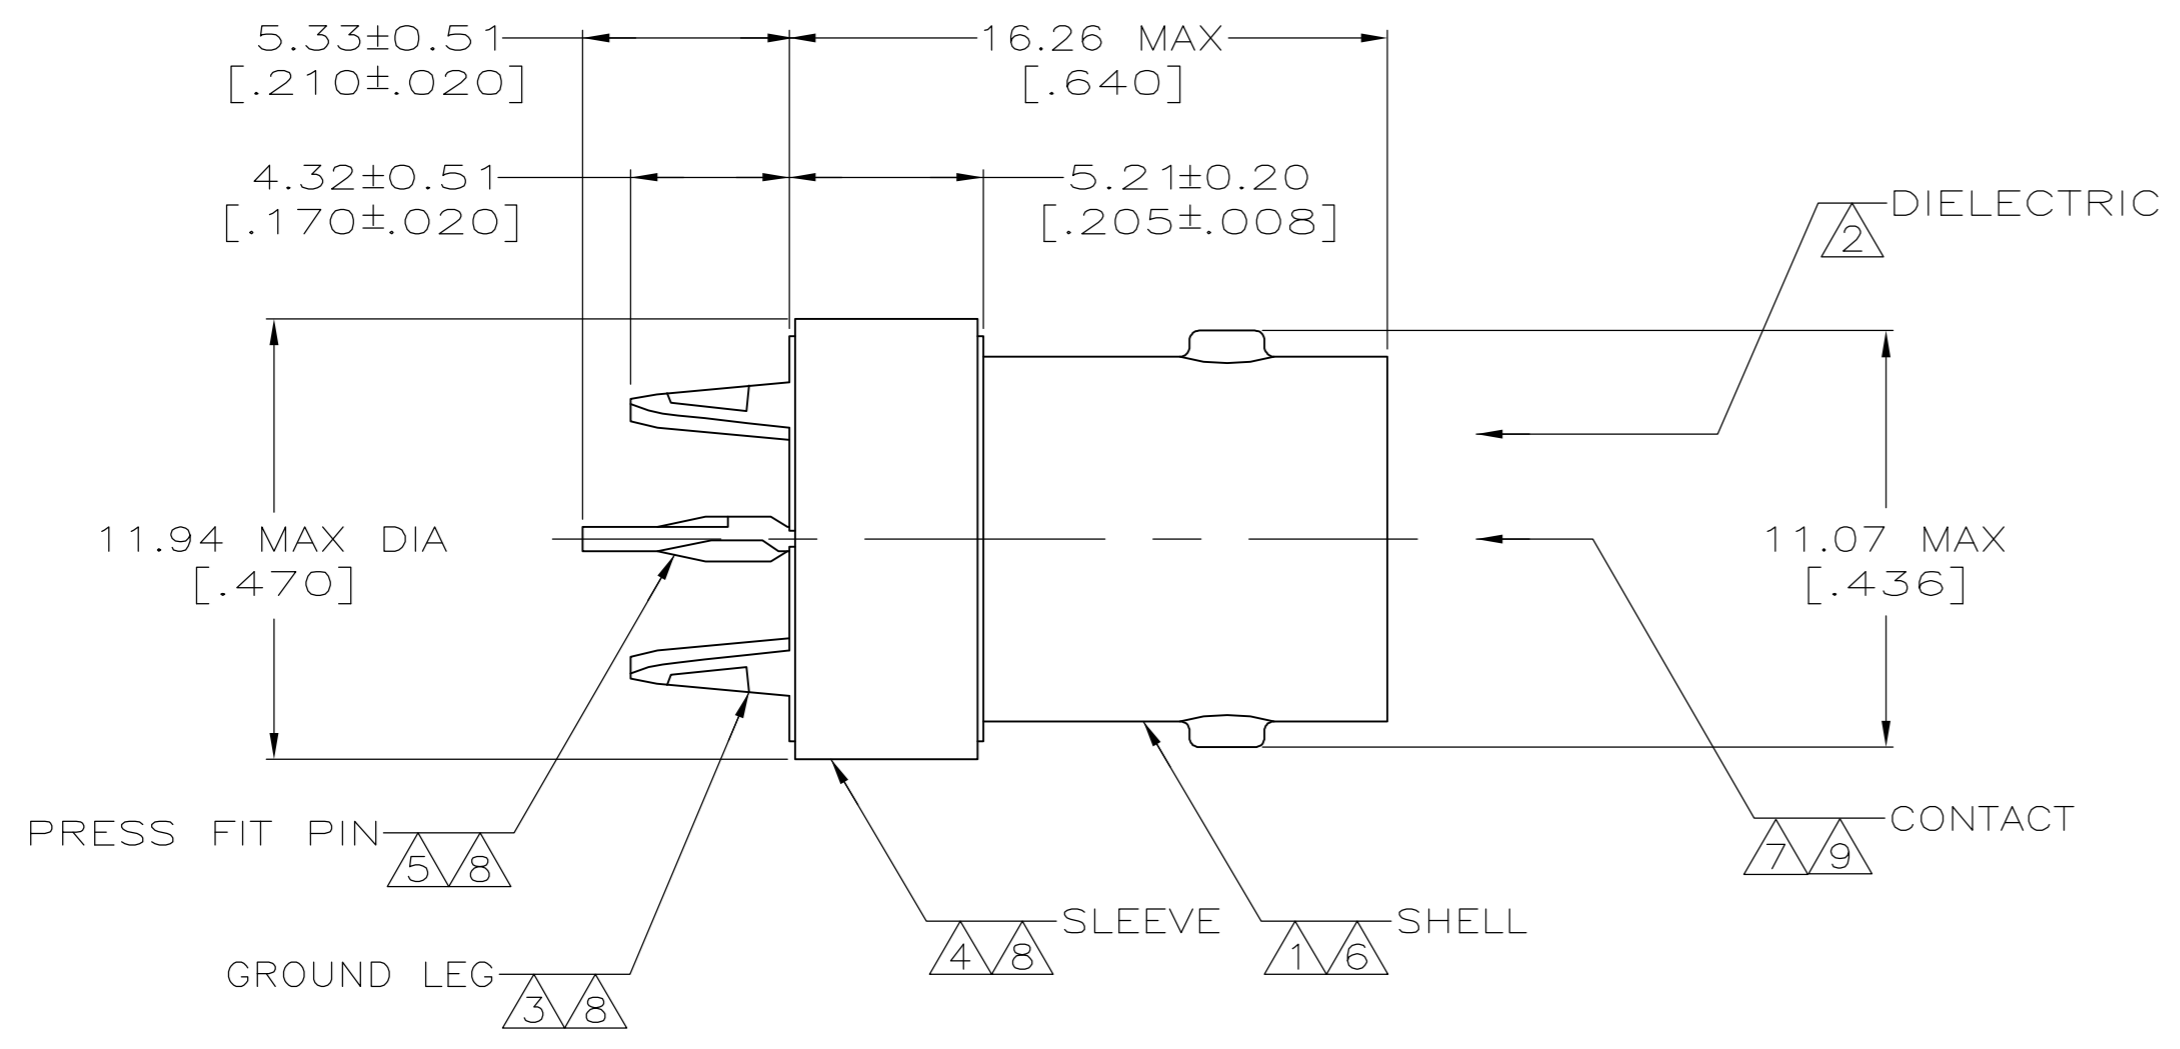

- 1 ZINC PER QQ-Z-363.
- 2 PTFE PER ASTM D 1710.
- 3 COPPER-IRON ALLOY PER ASTM B 465.
- 4 COPPER PER QQ-C-576.
- 5 COPPER-NICKEL ALLOY PER ASTM B 122.
- 6 NICKEL PLATE PER QQ-N-290
3.81 μm [.000150] MINIMUM THICK.
- 7 GOLD PLATE PER ASTM B 488
0.76 μm [.000030] MINIMUM THICK.
- 8 TIN PLATE PER ASTM B 545,
2.54 μm [.000100] MIN THICK.
- 9 BERYLLIUM COPPER PER ASTM B 643.
- 10. INTERFACE DIMENSIONS PER LUCENT SPEC WP-92009.
- 11. CONNECTOR PRESS FIT IS DESIGNED TO PROVIDE 100 LB. MINIMUM AXIAL RETENTION TO PCB COMPLIANT WITH TYCO APPLICATION SPEC 114-12001. AS A RESULT, DEFORMATION OF PLATED THROUGH HOLES WILL OCCUR. CUSTOMER VALIDATION AND ACCEPTANCE OF THIS DEFORMATION IS RECOMMENDED PRIOR TO SPECIFYING USE OF THIS PRODUCT.

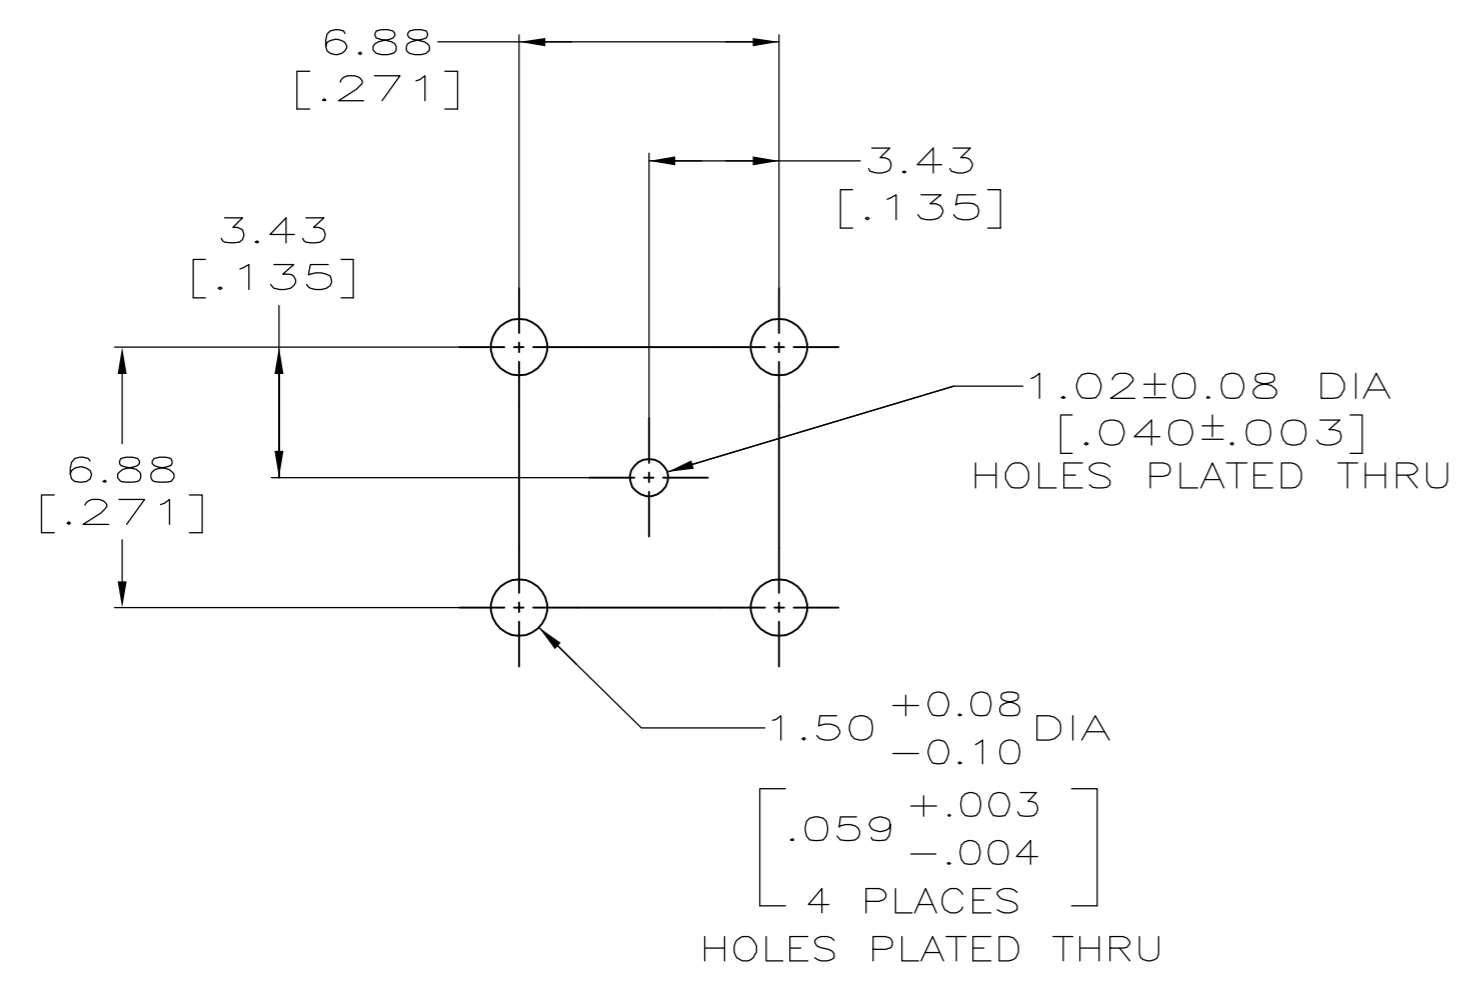

PCB CONFIGURATION

5414088-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. FERNANDEZ-DOCK5 22APR2005	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK J. HAVENER 22APR2005	NAME JACK, PCB, HIGH RETENTION PRESS FIT, 75 OHM, BNC	
	0 PLC ± -	APVD J. LIPPERT 22APR2005	SIZE A2	CAGE CODE 00779
	1 PLC ± -	PRODUCT SPEC	DRAWING NO C=5414088	RESTRICTED TO
MATERIAL	FINISH	APPLICATION SPEC	WEIGHT	SCALE
NOTES 1-5, 9	NOTES 6-8	WEIGHT	SCALE 5:1	SHEET 1 of 1
CUSTOMER DRAWING			REV B	