


# SERIES

**4214R**  
**4214**



## Wound Beads

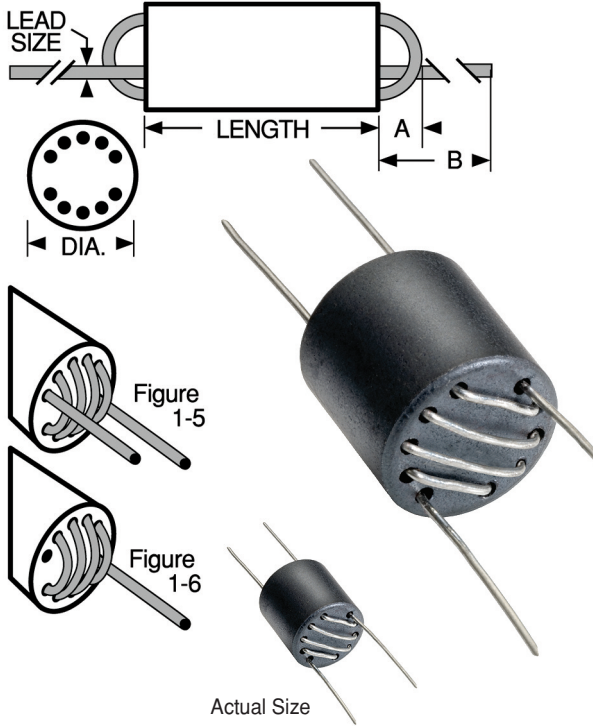

DASH NUMBER*	FIGURE	TURNS	MINIMUM IMPEDANCE				
			10 MHz	50 MHz	100 MHz	150 MHz	200 MHz
<b>SERIES 4214R / 4214</b>							
-2	1-5	2 1/2 x2	370	590	450	350	280
-4	1-6	4 1/2	700	1100	650	350	270

\*Complete part # must include series # PLUS the dash #  
For surface finish information, refer to [www.delevanfinishes.com](http://www.delevanfinishes.com)

**Wide Band Chokes** 10 hole ferrite slugs, made in API-2 Material, with 2 x 2.5 or 4.5 turns of tinned copper wire.

**Applications** Interference suppression

**Physical Parameters**

	Inches	Millimeters
Length	0.388 to 0.402	9.98 to 10.02
Diameter	0.388 to 0.402	9.98 to 10.02
Lead Size		
AWG #24 TCW	0.0185 to 0.0215	0.47 to 0.55
A	0.14 Max.	3.55 Max.
B	1.10 Min.	28.0 Min.

**Impedances** measured on HP 4191A Impedance Analyzer.

**High resistivity ferrite material** eliminates the need to insulate windings.

**Lead Wire** Plated copper

**Packaging** Bulk only

For more detailed graphs, contact factory

